
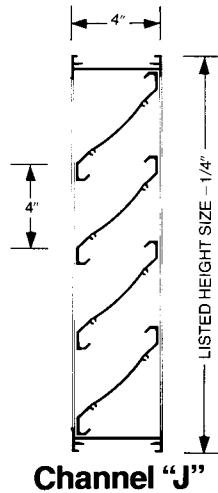


## 4" Outside Air Louvers

### OL-4-Channel-J


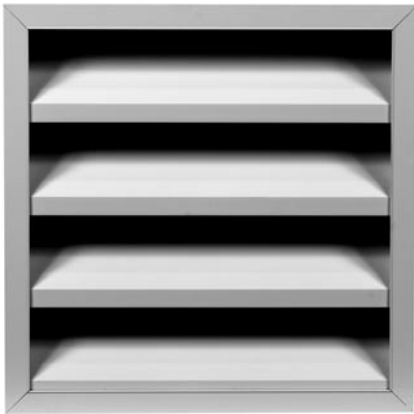


### product description

"J" Blade: This model is mill-finish 6063 extruded aluminum alloy with several high performance finishes available. Included in those are clear anodized, bronze anodized, baked enamel, power coated polyester and kynar. This model has a channel frame and is 4" deep. .080" extrusion is used throughout for maximum strength with the mechanically joined frame. An I-Beam is furnished as a connecting mullion for multiple piece units.

test data TD-26

### OL-4-Channel-K

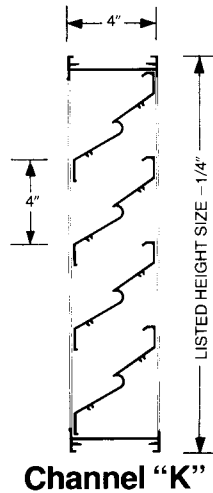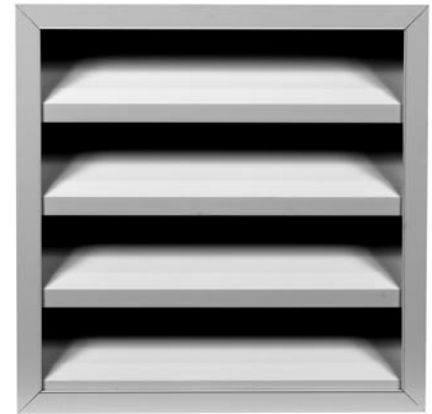

### product description

"K" Blade: Same as the "J" model except that a storm-and-rain resistant "K" configuration blade is utilized to help turn back driving rain. Available accessories are listed below.

test data TD-26

## Accessories:

Expanded Aluminum Screen .080"	Woven Fiberglass Insect Screen	Filter Frame	Opposed Blade Damper
Installed directly to the rear of the louver with sheet metal screws. Can be easily field-removed. has a 1/2" x 3/4 diamond-shaped pattern. Standard on all units if specified.	18 x 14-mesh. Factory-attached in a sub-frame and mounted to the rear of louver frame at additional cost.	All aluminum channel which can be adapted to suit 1", 2: or 4" filters to accommodate the size of the louver. Access to the filter bank is through an access door on the rear side of the louver. (Filter and access door not provided by factory.)	6063 extrude aluminum alloy damper identical to the model OB in the Accessories section. This damper is real-operated.

Notes: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_