



# T-BAR DIFFUSERS

PERFORATED SUPPLY CEILING DIFFUSERS

MODELS: PS1, PS10, PS2, PS20


SUSTAINABLE EXTRUDED ALUMINUM

Dimensions are in inches (mm)

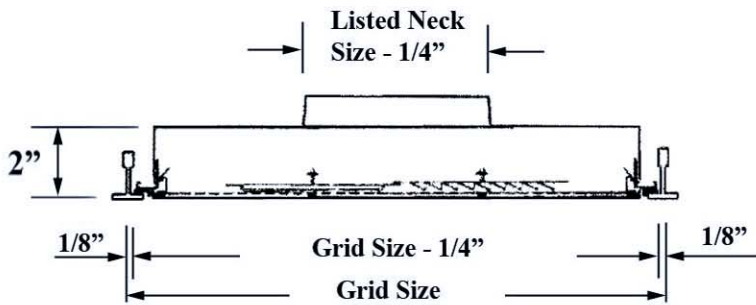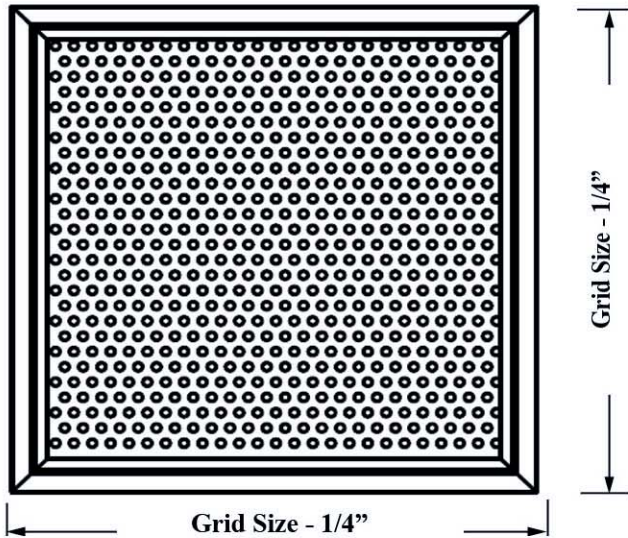

## MODEL:

PS1, PS10, PS2, PS20

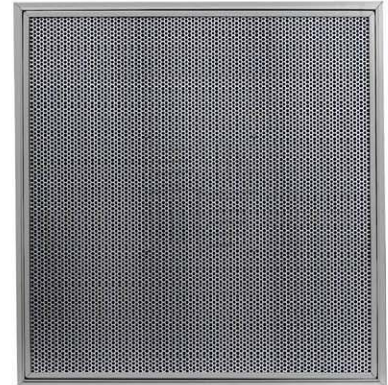

- PS1**  
Perforated supply ceiling diffuser, grid size 24 x 24, round neck.
- PS10**  
Perforated supply ceiling diffuser, grid size 48 x 24, round neck.
- PS2**  
Perforated supply ceiling diffuser, grid size 24 x 24, square neck.
- PS20**  
Perforated supply ceiling diffuser, grid size 48 x 24, square neck.

## DESCRIPTION:

1. These models are designed for an inverted T-bar application.
2. An extruded aluminum outer frame retaining the removable face is utilized for cleaning after installation. A series of spring clips which are totally concealed retain the face.
3. The model PS1 & 2 is designed for a 24"x24" T-bar system, and the model PS10&20 is designed for a 48"x24" T-bar system. Both models have field- adjustable pattern control for every conceivable air pattern required. Four individual spring-loaded pattern controls rotate to alter the air pattern.
4. All internal portions of the diffuser are non-reflective. A galvanized steel back is utilized with either a round neck spun into it or a square neck riveted to it.

## OPTIONS:

1. Finish
  - ANOD Clear Anodized
  - WHITE
  - MB Medium Bronze
  - B Black
  - Custom \_\_\_\_\_
2. Options:
  - PF, PFT

PROJECT:

ENGINEER:

CONTRACTOR:

DATE

SERIES

DRAWING NO.