


CEILING DIFFUSERS


FLUSH MOUNTED VARIABLE PATTERN ADJUSTABLE CEILING DIFFUSERS


MODELS: AVPAFM, AVPAFMOB

SUSTAINABLE EXTRUDED ALUMINUM

Dimensions are in inches (mm)



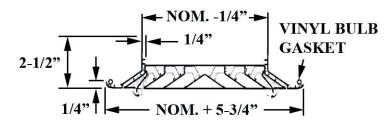



NOM. +3" = Hole Opening

DESCRIPTION:

- 1. Frame and blades are 6063 extruded aluminum alloy with 200-R1 satin anodized finish. The frame has typical wall thickness of .050".
- The AVP-A-FM permits easy adjustment (by hand) from horizontal to vertical, or in-between, in locations where periodic changes are required.
- 3. The core of this model is fully removable for easy installation. It is attached to the frame with sheet metal screws using holes that are dimpled, allowing for a counter-sunk fastener head appearance.
- 4. The ceiling diffuser projects 1/4" from the mounting surface. The unit size increases in 3" increments, beginning with 6"x6" as the smallest available.
- 5. Standard finish is Anodized. Other finishes are available.

MODEL:

AVPAFM



□ AVPAFM

Flush mounted variable pattern adjustable ceiling diffuser

□ AVPAFMOB

Flush mounted variable pattern adjustable ceiling diffuser with opposed blade damper

OPTIONS:

- 1. Finish
 - ☐ ANOD Clear Anodized
 - □ WHITE
 - ☐ MB Medium Bronze
 - □ B Black
 - Custom
- 2. Frame style
 - ☐ Beveled Frame
- 3. Other
 - □ AVP-A-FM-OB-EG
 - □ AVP-A-FM-OB-SR

PROJECT:

ENGINEER: DATE SERIES DRAWING NO.
CONTRACTOR: