

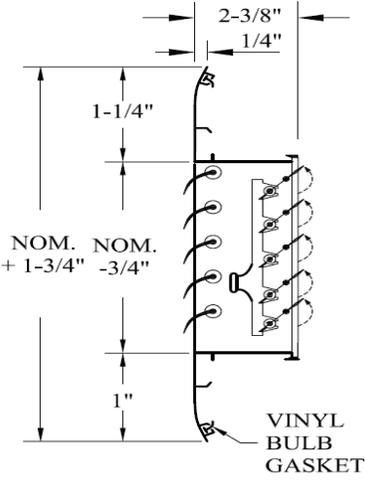






CEILING GRILLES SERIES WITH MULTI-SHUTTER DAMPER
CURVED BLADE SUPPLY REGISTER WITH PARALLEL BLADE DAMPER
MODELS: CB1ML, CB2ML, CB3ML, CB4ML

SUSTAINABLE EXTRUDED ALUMINUM

Dimensions are in inches

<p>1-way</p> 		<p>CB1ML</p> <p>1-way curved blade supply register with parallel blade damper.</p>
<p>2-way</p> 		<p>CB2ML</p> <p>2-way curved blade supply register with parallel blade damper.</p>
<p>3-way</p> 		<p>CBML-3ME</p> <p>3-way curved blade supply register with parallel blade damper.</p>
<p>4-way</p> 		<p>CBML-4ME</p> <p>4-way curved blade supply register with parallel blade damper.</p>

DESCRIPTION:

1. Frames and blades are 6063 extruded aluminum alloy with 200-R1 satin anodized finish. The frame has a typical wall thickness of .050" and is separated from the blades with injection-molded nylon bushings.
2. The register blades are curved in design, individually adjustable and spaced 1" on center. At the other edge of the frame is a specially engineered channel which retains an extruded flexible vinyl bulb gasket that produces a positive air seal at the mounting surface, minimizing smudging.
3. Square and rectangular patterns are available. Suitable for ceiling applications.
4. Available in clear anodized, white or a variety of custom colors.

OPTIONS:

1. Finish
 - White
 - ANOD Clear Anodized
 - Medium Bronze
 - Black
 - Custom _____
2. Options
 - 2-way Corner Blow
 - PF (Plaster Frame)
 - PLT
3. Frame style
 - Beveled Frame Available
 - ME (square contour) Frame

PROJECT:

ENGINEER:

CONTRACTOR:

DATE	SERIES	DRAWING NO.
-------------	---------------	--------------------