




CEILING GRILLES SERIES WITH MULTI-SHUTTER DAMPER
CURVED BLADE SUPPLY REGISTER WITH PARALLEL BLADE DAMPER
MODELS: CBML-1ME, CBML-2ME, CBML-3ME, CBML-4ME


SUSTAINABLE EXTRUDED ALUMINUM

Dimensions are in inches


1-way





2-way



3-way



4-way

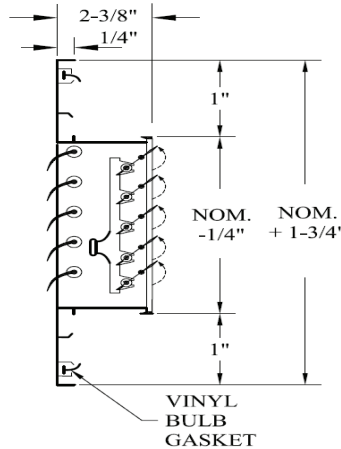

CBML-1ME

1-way curved blade supply register with square contour frame and parallel blade damper.

CBML-2ME

2-way curved blade supply register with square contour frame and parallel blade damper.

CBML-3ME

3-way curved blade supply register with square contour frame and parallel blade damper.

CBML-4ME

4-way curved blade supply register with square contour frame and parallel blade damper.

OPTIONS:

1. Finish

- White
- ANOD Clear Anodized
- Medium Bronze
- Black
- Custom _____

2. Options

- 2-way Corner Blow
- PF (Plaster Frame)
- PLT

3. Frame style

- Beveled Frame Available
- ME (square contour) Frame

DESCRIPTION:

1. Frames and blades are 6063 extruded aluminum alloy with 200-R1 satin anodized finish. The frame has a typical wall thickness of .050" and is separated from the blades with injection-molded nylon bushings.
2. The register blades are curved in design, individually adjustable and spaced 1" on center. At the other edge of the frame is a specially engineered channel which retains an extruded flexible vinyl bulb gasket that produces a positive air seal at the mounting surface, minimizing smudging.
3. Square and rectangular patterns are available. Suitable for ceiling applications.
4. Available in clear anodized, white or a variety of custom colors.

PROJECT:

ENGINEER:

CONTRACTOR:

DATE

SERIES

DRAWING NO.