





INDUSTRIAL SUPPLY GRILLES SERIES

DOUBLE DEFLECTION INDUSTRIAL SUPPLY GRILLES AND REGISTERS

MODELS: VHME-I, VHME-I-OB, HVME-I, HVME-I-OB

SUSTAINABLE EXTRUDED ALUMINUM

Dimensions are in inches

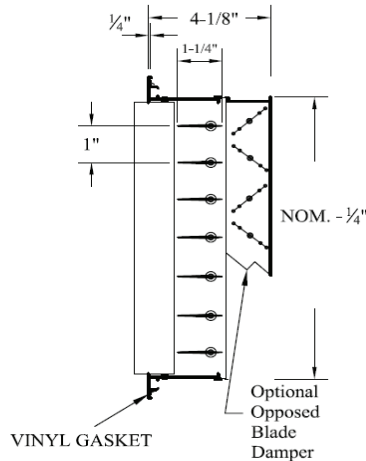
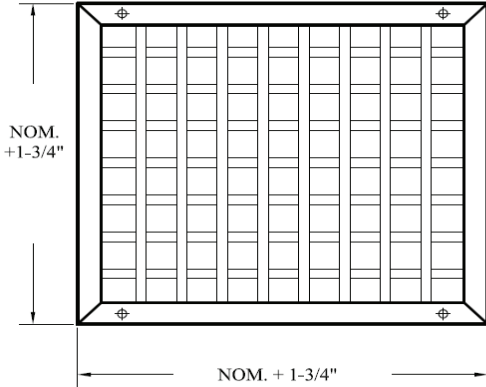


VHME-I

Double Deflection Industrial Supply Grille with individually adjustable vertical and/or horizontal blades and with square contour frame.

VHME-I-OB

Double Deflection Industrial Supply Grille with individually adjustable vertical and/or horizontal blades and with square contour frame (includes OB Damper).

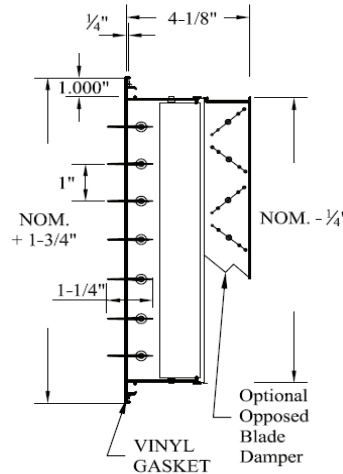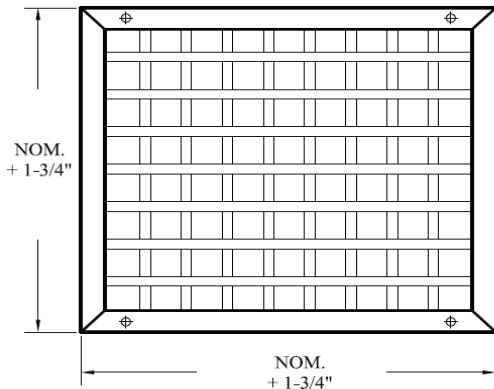

HVME-I

Double Deflection Industrial Supply Grille with individually adjustable horizontal and/or vertical blades and with square contour frame.

HVME-I-OB

Double Deflection Industrial Supply Grille with individually adjustable horizontal and/or vertical blades and with square contour frame (includes OB Damper).

DESCRIPTION:

1. Construction: 6063 Extruded aluminum frame mechanically interlocked with hairline mitered corner for strength. Blades are individually adjustable and spaced 3/4" on center with zero metal-to-metal contact with the use of nylon bushings to eliminate noise, corrosion and vibration. Extruded flexible vinyl gasket is standard and produces a perfect positive air seal.
2. An optional opposed blade damper is screwdriver-operated and has the same extruded aluminum construction and injection-molded nylon bushings.
3. This industrial-quality unit is designed for high-velocity application where Rugged construction is a requirement. It has a 1-1/4" blade to allow better control of the air.
4. Standard finish is White.

OPTIONS:

1. Finish

- White
- ANOD Clear Anodized
- Medium Bronze
- Black
- Custom _____

2. Options

- OBFL (Fire link)
- PF (Plaster Frame)
- PLT

3. Frame style

- Beveled Frame Available
- ME (square contour) Frame

PROJECT:

ENGINEER:

CONTRACTOR:

DATE

SERIES

DRAWING NO.