





SIDEWALL SERIES

DOUBLE DEFLECTION SUPPLY GRILLES AND REGISTERS

MODELS: VH, VH-OB, HV, HV-OB

SUSTAINABLE EXTRUDED ALUMINUM

Dimensions are in inches

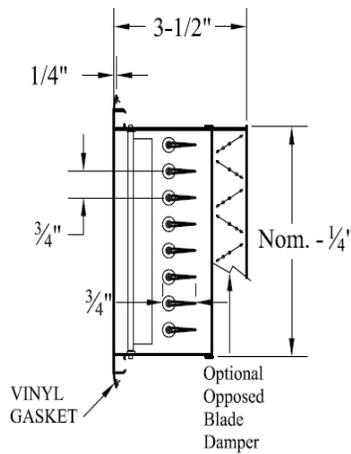
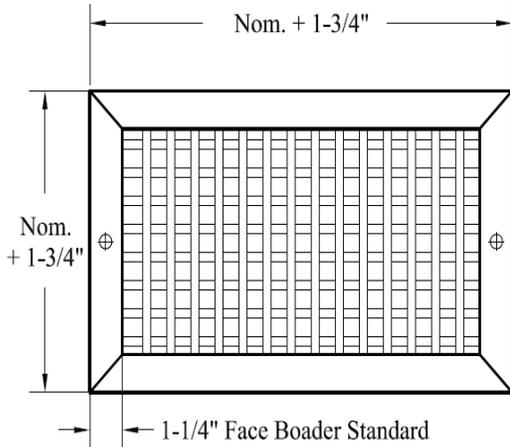


VH

Double Deflection Supply Grille with Front Blades Parallel to the Vertical Dimension.

VH-OB

Double Deflection Supply Register with Front Blades Parallel to the Vertical Dimension (includes OB Damper).

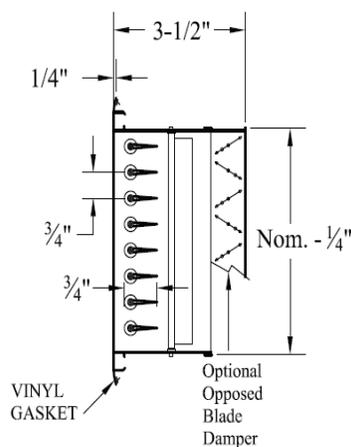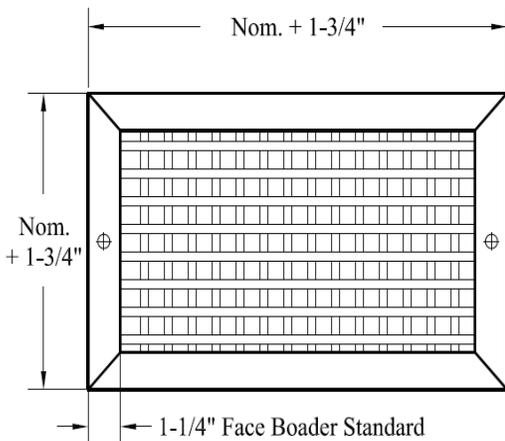

HV

Double Deflection Supply Grille with Front Blades Parallel to the Horizontal Dimension.

HV-OB

Double Deflection Supply Register with Front Blades Parallel to the Horizontal Dimension (includes OB Damper).

DESCRIPTION:

1. Construction: 6063 Extruded aluminum frame mechanically interlocked with hairline mitered corner for strength. A double set of 6063 extruded aluminum blades with 3/4" spacing provides air control in both vertical and horizontal planes. Blades are individually adjustable with zero metal-to-metal contact with the use of nylon bushings to eliminate noise, corrosion and vibration. Extruded flexible vinyl gasket is standard and produces a perfect positive air seal.
2. Optional screwdriver operated opposed blade damper with nylon bushings.
3. Standard fastening is countersunk screw holes.
4. Standard finish is White.

OPTIONS:

1. Finish
 - ANOD Clear Anodized
 - Medium Bronze
 - Black
 - Custom _____
2. Options
 - OBFL (Fire link)
 - PF (Plaster Frame)
 - PLT
3. Frame style
 - Beveled Frame Available
 - ME (square contour) Frame

PROJECT:

ENGINEER:

CONTRACTOR:

DATE

SERIES

DRAWING NO.